

GAST MANUFACTURING, INC. A Unit of IDEX Corporation Post Office Box 97 Benton Harbor, Michigan Ph: 269/926-6171 Fax: 269/925-6288

PART NUMBER:

LTD141

REV.

**Product Specifications** 

MODEL NUMBER	MOTOR SPECIFICATIONS	RPM	MAX VAC		MAX PRESS		HP	kW	NET WT.	
			'H <sub>2</sub> 0	mbar	"H <sub>2</sub> O	mbar		NW	lbs.	kg
R3305A-1	190-220/380-415-50-3	2850	28	70	31	77	1/3	0,25	1 20	13,2
	208-230/460-60-3	3450	40	100	43	107	1/2	0,37		

SOUND LEVEL 68/63 dB(A) MAX. 9 60/50 Hz


NORMAL AMBIENT -29°C TO 40°C

RELATIVE HUMIDITY 0% - 100% NON CONDENSING

ENVIRONMENT CLEAN DUST FREE

TECHNICAL DATA SUBJECT TO CHANGE WITHOUT NOTICE.

## Product Performance (Metric U.S. Imperial)

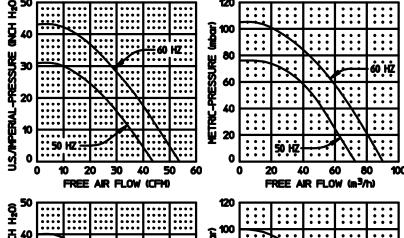

PERFORMANCE DATA
THE PERFORMANCE DATA SHOWN WAS DETERMINED
UNDER THE FOLLOWING CONDITIONS:

LINE VOLTAGE 0 60 Hz. 230V OR 460V FOR 3 PHASE UNITS. 115V OR 230V FOR 1 PHASE UNITS.

LINE VOLTAGE © 50 Hz. 220V FOR 3 PHASE OR 1 PHASE UNITS.

100 UNITS IN A TEMPERATURE STABLE CONDITION.


DELIVERY MEASUREMENTS MADE WITH OUTPUT PORT THROTTLED.

SUCTION MEASUREMENTS MADE WITH INPUT PORT THROTTLED.

TEST CONDITIONS: INLET AIR DENSITY **9** 0.075 lbs. per cu. ft. [20°C (68°F), 29.92° Hg (14.7 PSIA)].

NORMAL PERFORMANCE VARIATIONS ON THE RISISTANCE CURVE WITHIN ±10% OF SUPPLIED DATA CAN BE EXPECTED.

Metric (mm) / U.S. Imperial (inches)

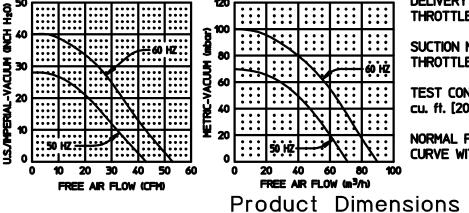

WIRING DIAGRAM

257.81 10.62 257.81 10.65 34.8 1.37 2x \$\frac{90.67}{4/2}\$ THRU

257.81 10.65 34.8 1.37

2x \$\frac{90.67}{4/2}\$ THRU

257.81 10.65 20.67 10.67 

**BOTTOM OF FOOT**