



GAST MANUFACTURING, INC.
A Unit of IDEX Corporation
Post Office Box 97
Benton Harbor, Michigan
Ph: 269/926-6171
Fax: 269/925-8288

PART NUMBER:

LTD148

REV.

G


Product Specifications

MODEL NUMBER	MOTOR SPECIFICATIONS	RPM	MAX VAC		MAX PRESS		HP	kW	NET WT.	
			"H ₂ O	mbar	"H ₂ O	mbar			lbs.	kg
R6125-2	110/220-240-50-1	2850	45	112	35	87	1.5	1.1	87	39.5
	115/208-230-60-1	3450	55	137	45	112	2.5	1.9		

SOUND LEVEL 72/69 dB(A) MAX. @ 60/50 Hz
NORMAL AMBIENT -29°C TO 40°C
RELATIVE HUMIDITY 0% - 100% NON CONDENSING
ENVIRONMENT CLEAN DUST FREE

TECHNICAL DATA SUBJECT TO
CHANGE WITHOUT NOTICE.

Product Performance (Metric U.S. Imperial)

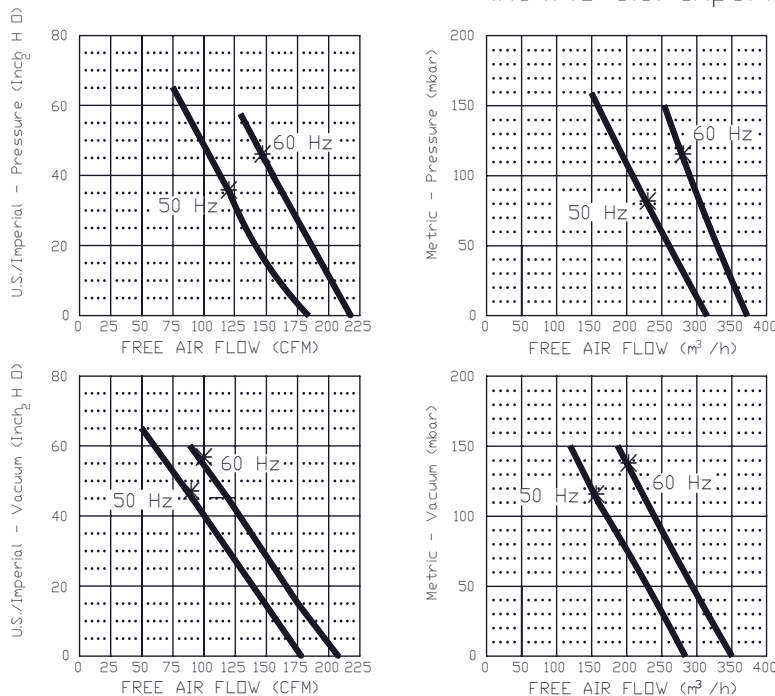

PERFORMANCE DATA

THE PERFORMANCE DATA SHOWN WAS DETERMINED
UNDER THE FOLLOWING CONDITIONS:

LINE VOLTAGE @ 60 Hz. 230V OR 460V FOR 3 PHASE
UNITS. 115V OR 230V FOR 1 PHASE UNITS.

LINE VOLTAGE @ 50 Hz. 220V FOR 3 PHASE OR 1
PHASE UNITS.

UNITS IN A TEMPERATURE STABLE CONDITION.

DELIVERY MEASUREMENTS MADE WITH OUTPUT PORT
THROTTLED.

SUCTION MEASUREMENTS MADE WITH INPUT PORT
THROTTLED.

TEST CONDITIONS: INLET AIR DENSITY @ 0.075 lbs. per
cu. ft. [20°C (68°F), 29.92" Hg (14.7 PSIA)].

NORMAL PERFORMANCE VARIATIONS ON THE RESISTANCE
CURVE WITHIN ±10% OF SUPPLIED DATA CAN BE EXPECTED.

* DENOTES RECOMMENDED
MAXIMUM DUTY
---- INTERMITTENT DUTY ONLY

Product Dimensions (Metric (mm) / U.S. Imperial (inches))

WIRING DIAGRAM

LOW VOLTAGE
P1 — LINE
P2 — TIE TOGETHER
T3 — & INSULATE
T2 — LINE
T4 — LINE

HIGH VOLTAGE
P1 — LINE
P2 — INSULATE
T3 — TIE TOGETHER
& INSULATE
T2 — LINE
T4 — LINE

