

PRODUCT SPECIFICATIONS

MODEL NO.	MOTOR	RPM	AMPS	HP	kW	NET WT.		CAPACITOR	
						lbs.	kg	mfd.	VOLT
MOA-P101-JH	12V DC	1800	6.8	1/16	0.05	5.3	2.4	----	
MOA-P101-JK	24V DC	1800	3.2	1/16	0.05	5.3	2.4	----	
MOA-P126-JK	24V DC	1800	3.2	1/16	0.05	5.3	2.4	----	
MOA-P101-KH	12V DC	3000	12.2	1/8	0.09	5.3	2.4	----	

SOUND LEVEL Less than 70 dB(A) (P101-KH 69-76 dB(A))

NORMAL AMBIENT +5 degC - +40 degC



RELATIVE HUMIDITY 20% - 80%

ENVIRONMENT Clean Dust Free

NOTES:

1. TECHNICAL DATA SUBJECT TO CHANGE WITHOUT NOTICE.
2. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
3. PRODUCT DIMENSIONS: U.S. IMPERIAL (in) METRIC (mm)
4. THESE MODELS REQUIRE ADDITIONAL CAPACITANCE TO BE APPLIED TO THE ELECTRICAL INPUT IN ORDER TO COMPLY WITH THE EU EMC DIRECTIVE. SEE SHEET 2 OF 2.

PRODUCT PERFORMANCE:

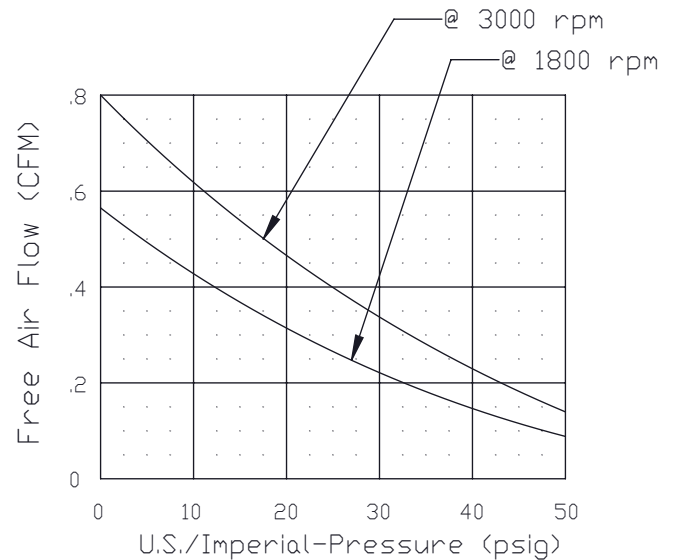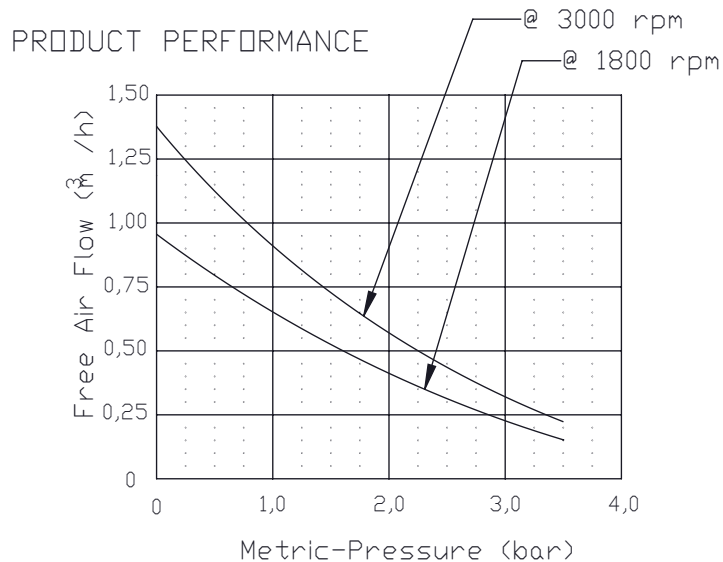

PRODUCT DIMENSIONS:

